




Chandler, Arizona
PHONE (800) 380-0103

SAFE-T-SHORE
TRENCH SHIELDS

MODEL	S6D6X24	SERIAL NUMBER	26086
-------	---------	---------------	-------

REFERENCE TO OCCUPATIONAL SAFETY AND HEALTH ADMINISTRATION RULES AND REGULATIONS, 29 CFR, NO 209, PART 1926, SUBPART P

SHIELD SIZE		PSF RATING	MAXIMUM ALLOWABLE DEPTH OF CUT (FEET)			
			D			
HEIGHT (FEET)	LENGTH (FEET)	MAXIMUM LATERAL EARTH PRESSURE CAPACITY AT TRENCH BOTTOM IN POUNDS PER SQUARE FOOT	TYPE B	TYPE C-60	TYPE C-80	
			6	24	1140	MEDIUM COHESIVE TO GRANULAR SOIL. 45 PSF PER FOOT OF DEPTH.
LIMITATIONS IN USE OF TABLE			DESCRIPTION	DESCRIPTION	DESCRIPTION	
<ol style="list-style-type: none"> TRENCH SHIELD TO BE ASSEMBLED AND INSTALLED AS SHOWN AND IN ACCORDANCE WITH MANUFACTURER'S INSTRUCTIONS. EXCAVATION 2 FEET BELOW BOTTOM OF SHIELD IS PERMITTED WHEN NO LOSS OF SOIL FROM BEHIND OR BELOW THE BOTTOM OF SHIELD IS ENCOUNTERED. SEE PARAGRAPH 1926.652 (e)(2)(i). THE COMPETENT PERSON SHALL MAKE THE DETERMINATION FOR COMPLIANCE. SUDDEN SHIFTING OF THE SHIELD VERTICALLY SHALL BE AVOIDED. CONSULT MANUFACTURER WHEN RESTRICTION ON NOTE 2 IS NOT MET. ADDITIONAL SHIELDS MAY BE STACKED WITH NO PENALTY IN DEPTH OF CUT AS LONG AS THE RATING OF THE BOTTOM SHIELD IS NOT EXCEEDED. DEPTHS OF CUTS SHOWN ARE BASED ON EXAMPLES OF VARIOUS SOIL CONDITIONS. VERIFY ACTUAL SOIL PRESSURES PRIOR TO EACH USE. ANY MODIFICATIONS OR ALTERATIONS NOT ALLOWED UNLESS APPROVED IN WRITING BY EFFICIENCY PRODUCTION, INC. CONTRACTOR'S COMPETENT/QUALIFIED PERSON SHALL BE RESPONSIBLE FOR MONITORING SOIL CONDITIONS. CONTINUED ON REVERSE SIDE			Clay, with Unconfined Compressive Strength Greater than .5 TSF But Less than 1.5 TSF Cohesionless Gravel, Silt, Silt Loam or Sandy Loam.	Soft Cohesive Soil Unconfined Compressive Strength Less than .5 TSF Gravel, Sand and Loamy Sand; Submerged Soil or fractured Rock that is not Stable.	Soft Cohesive Soil Unconfined Compressive Strength Less than .5 TSF Gravel, Sand and Loamy Sand; Submerged Soil or fractured Rock that is not Stable.	
			25	19	14	
			LAYBACK AND SLOPE AT A MINIMUM OF 1 TO 1 FOR B-SOILS, OR 1.5 TO 1 FOR C SOILS			
			B-SOILS (1 TO 1 SLOPE)			
			C-SOILS (1.5 TO 1 SLOPE)			
			NOTE 2			
			NOTE 1			

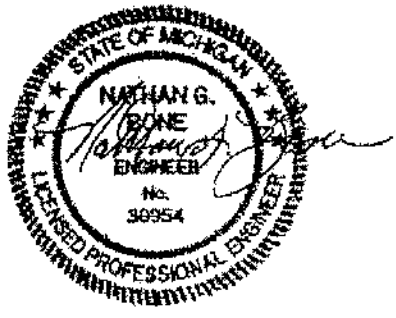

CERTIFIED BY:
EFFICIENCY PRODUCTION, INC.
MARCH 20, 2006

COPYRIGHT:
1991 EFFICIENCY PRODUCTION, INC.
ALL RIGHTS RESERVED

MANUFACTURED UNDER ONE OR MORE OF THE FOLLOWING U.S. PATENT NUMBERS;
4,090,365-4,114,383-4,259,028
ONE OR MORE OF THE FOLLOWING CANADIAN PATENT NUMBERS: 1,062,683-1,062,684


USE THIS PRODUCT ONLY IN ACCORDANCE WITH APPLICABLE FEDERAL, STATE, OR LOCAL LAWS

Any use of this product not specifically described on this certificate could cause cave-in, collapse, or structural failure resulting in death or serious injury.

8. NOT TYPE A IF FISSURED, SUBJECT TO VIBRATION, PREVIOUSLY DISTURBED OR PART OF A SLOPED LAYERED SYSTEM WHERE LAYERS DIP INTO EXCAVATION ON A SLOPE OF FOUR HORIZONTAL TO ONE VERTICAL (4H:1V) OR GREATER.
9. PREVIOUSLY DISTURBED SOILS MAY BE TYPE B UNLESS THEY WOULD BE CLASSIFIED AS TYPE C. SOIL THAT MEETS REQUIREMENTS OF TYPE A, BUT IS SUBJECT TO VIBRATION OR FISSURED MAY BE TYPE B. DRY ROCK THAT IS NOT STABLE OR SOIL THAT IS PART OF A SLOPED, LAYERED SYSTEM WHERE LAYERS DIP INTO THE EXCAVATION ON A SLOPE LESS STEEP THAN FOUR HORIZONTAL TO ONE VERTICAL (4H:1V) ARE TYPE B BUT ONLY IF MATERIAL WOULD OTHERWISE BE CLASSIFIED AS TYPE B.
10. SOIL IN A SLOPED LAYERED SYSTEM WHERE LAYERS DIP INTO THE EXCAVATION ON A SLOPE OF FOUR HORIZONTAL TO ONE VERTICAL (4H:1V) OR STEEPER MAY BE TYPE C. SUBMERGED SOIL IS MATERIAL WITH WATER FREELY SEEPING AND ENTERING THE TRENCH, BUT ONLY PART OF THE DEPTH OF THE RETAINED SOIL IS SUBMERGED. CONDITIONS MORE SEVERE WOULD REQUIRE DEWATERING OR SEALING FOUR SIDES OF THE EXCAVATION AND PUMPING THE TRENCH. SUCH SEVERE CONDITIONS WOULD REQUIRE THE SERVICES OF A SOILS ENGINEER TO ESTABLISH THE DESIGN PRESSURE. CONSULT THE MANUFACTURER FOR PRESSURES EXCEEDING TABULATED VALUES.
11. ANY USE OF A TRENCH SHIELD WITHOUT EFFICIENCY SPREADERS AND PINS OR EQUAL WILL VOID THE TABULATED DATA AND WARRANTY.
12. SHIELD WAS DESIGNED TO BE USED WITHOUT PLATES EXTENDING BELOW, ABOVE, OR NEXT TO IT. ANY USE OF SUCH PLATES OR PANELS MAY VOID THE TABULATED DATA, AND MAY REQUIRE SITE SPECIFIC ENGINEERING.
13. TRENCH SHIELDS ARE DESIGNED TO BE PUSHED TO GRADE IF NECESSARY. AS NOTED BELOW, ANY UNNECESSARY ABUSE BY THE EXCAVATOR AND OR OPERATOR (SUCH AS POUNDING WITH THE BUCKET) WILL VOID THE TABULATED DATA AS WELL AS THE WARRANTY.
14. AN EXCAVATOR SHALL BE RATED TO HANDLE 1 1/2 TIMES THE WEIGHT OF THE SHIELD AND SPREADERS (ACCORDING TO THE MANUFACTURERS LIFTING CAPACITY CHART FOR THAT MACHINE) AT GRADE AND AT A RADIUS OF 20' FROM THE CENTER OF THE EXCAVATOR.
15. CONDITION OF SHIELD, SPREADER PIPES, AND SPREADER PINS MUST BE CHECKED/INSPECTED FOR SERVICEABILITY BY THE COMPETENT PERSON PRIOR TO EACH USE. PSF RATING IS NOT VALID IF THERE IS ANY VISIBLE DAMAGE TO, OR REPAIRS MADE TO THE SHIELD THAT HAVE NOT BEEN DOCUMENTED AND CERTIFIED BY A REGISTERED PROFESSIONAL ENGINEER.

Assembly

Lay side panel flat on ground with collar sockets up ...




Mud Plate Spreader System

Place spreader pipe and/or plate onto collars or into brackets and pin in place. Secure pins with keepers.




5 Pipe Spreader System

Lower second sidewall onto spreaders and pin.




4 Pipe Spreader System

Stand trench shield in upright position and prepare for installation.




Using a trench shield in stable soil


Excavate to grade just slightly wider than the trench shield. Dig walls vertical to minimum of 18" below the top of the shield. Slope soil above shield according to manufacturers tabulated data. Install shield in trench.



Excavate in front of the trench shield

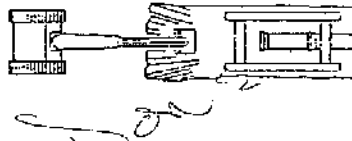


Pull shield forward by front top spreader pipe or with pulling eyes. (pulling eyes shall be used with spreaders wider than 72" or when soil pressure is severe enough to cause spreader to deflect).




Using a shield in unstable soil


Excavate until soil begins to crumble beyond desired trench width. Place shield on line of excavation.

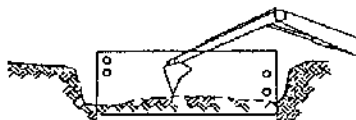


Press down on corners to push shield down to grade



Pull shield forward and up on appropriate angle.




Excavate soil within the shield and repeat previous process.

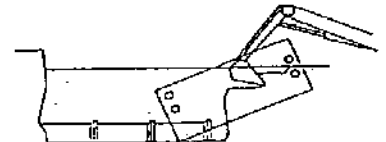


Using shields for patchwork, repairs or tie-ins

- * Center shield over work area.
- * Lay soil at ends back according to manufacturers tabulated data or use manufacturer's designed end plates to protect from cave-ins.




Manhole box with corner end plates

Corner end plates help prevent loose material from running into the end of the shield. Soil at ends should be sloped according to manufacturers tabulated data

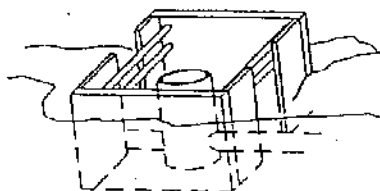

Using 4-sided shields

When using shields as protection during manhole assembly work, insure that proper end panels are used, or lay soil at the ends back according to manufactures tabulated data.



* This material is intended to provide basic assembly and installation information only.
 * Always use trench shield in accordance with applicable local, state, and federal safety laws and regulations. Failure to do so could cause severe injury or death.